



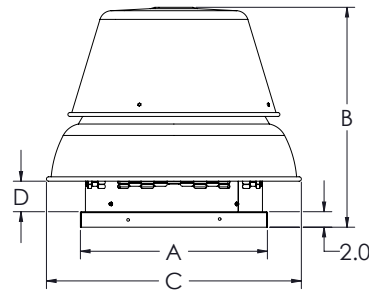

MODEL SDBDe CENTRIFUGAL DOWNBLAST ROOF FANS WITH EC MOTORS

SDBDe Sizes 6, 7, 8, & 10

SDBDe Sizes 12, 14, 15, & 16

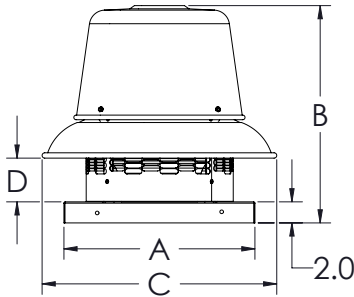

STANDARD FEATURES

- Exhaust air up to 4,980 CFM in high static pressure applications up to 1-3/4" w.g.
- Attractive spun aluminum exterior
- Direct drive units have low sound levels and quiet operation
- Curved non-overloading backward inclined wheel for efficiency at higher static pressures
- AMCA Air and Sound Licensed
- cULus 705 Listed



Size	A	B	C	D	Roof Opening	Curb O.D.	Damper O.D.	Average Ship Wt. Lbs.
6	18 1/8	14	22 1/3	1 1/2	13 1/2	16 1/2	12	109
7	18 1/8	16 4/5	22 1/3	4	13 1/2	16 1/2	12	109
8	18 1/8	16 4/5	22 1/3	4	13 1/2	16 1/2	12	109
10	18 1/8	19 4/5	22 1/3	5	13 1/2	16 1/2	12	109
12	20 1/9	27 3/5	27 3/5	3 8/9	15 1/2	18 1/2	14	122
14	20 1/9	27 3/5	27 3/5	3 8/9	15 1/2	18 1/2	14	126
15	24 1/9	28 1/3	32 8/9	4	19 1/2	22 1/2	18	140
16	24 1/9	28 1/3	32 8/9	4	19 1/2	22 1/2	18	140

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS					1	2	3	4	5	ACCESSORY ITEMS					1	2	3	4	5
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									

Subject to change unless approved in submittal by S&P
SDBDe-Submittal-0817