



P: 866.733.0233
www.solerpalaucanada.com


MODEL RED CENTRIFUGAL ROOF EXHAUSTER DIRECT DRIVE

FEATURES

- AMCA Air & Sound Licensed
- UL Listed-Standard 705 (optional)
- Aluminum Construction
- Stainless Steel Alloy Exterior Fasteners
- Speed Controllable Motors
- 5 Year Fan Warranty
- 1 Year Motor Warranty
- Aluminum Birdscreen
- Internal Conduit Wiring Chase
- Electrical Disconnect



Standard 705
(optional)

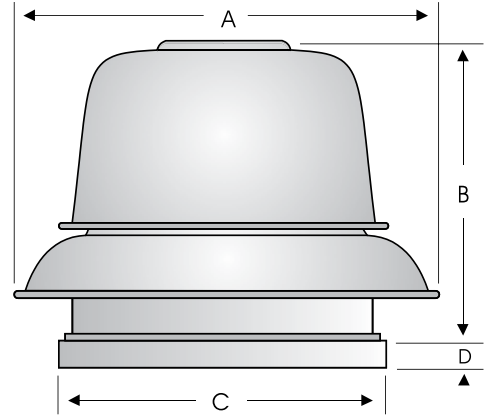

Size	Dimensions (Inches)							Average Ship Wt. (lbs)
	A	B	C	D	E	F	G	
6	21 3/4	12	16 1/2	1 3/4	11	14 3/4	11 3/4	50
8	21 3/4	15 3/4	16 1/2	1 3/4	11	14 3/4	11 3/4	50
10	21 3/4	17 1/4	16 1/2	1 3/4	11	14 3/4	11 3/4	50
12	33 1/8	23 1/2	24	2	18	22 1/4	19 1/4	120
15	33 1/8	23 1/2	24	2	18	22 1/4	19 1/4	124

A - Outside diameter of unit. E - O.D. backdraft damper (box frame type).
 B - Height of unit above top of curb. (MAX") F - Outside dimension of factory built prefab curb.
 C - Inside dimension of square curb cap. G - Recommended roof opening.
 D - Depth of curb mounting flange (Inside dimension of factory built prefab curb)

FAN SPECIFICATIONS									MOTOR SPECIFICATIONS				
Line	Qty.	Model No.	Tag	CFM	SP	Fan RPM	BHP	Sones	HP	Volts	Phase	Hertz	Encl
1													
2													
3													
4													
5													

ACCESSORY ITEMS					1	2	3	4	5	ACCESSORY ITEMS					1	2	3	4	5
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									
<input type="checkbox"/>										<input type="checkbox"/>									

Project: _____ Submitted: _____
 Customer: _____ Approved: _____
 Location: _____